
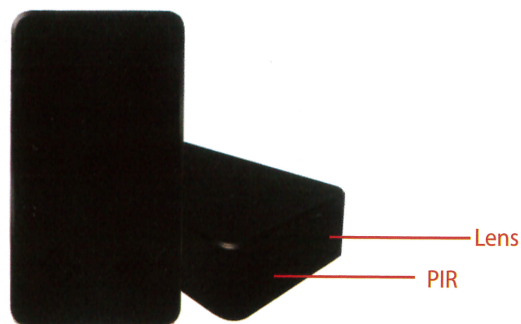


HD 1080 Pro Night Vision Black Box Security DVR Camera

User Manual
Version: Nov, 2017

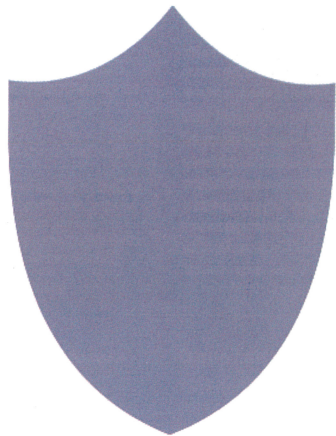

1

Overview:

HD 1080 Pro Night Vision Black Box Security DVR Camera, is a fully upgraded smart & powerful 1080P DVR invisible security camera.

First, it is a simple designed black box camera, but equipped with 5meters invisible night vision+PIR detection video recording;

Second, it is super easy to set up. And can standby for around 7 months with it's built-in 5000mA battery;

Third, it supports cycle recording and work when charging.

Usages: Nanny camera, Home/ Shop/ Office/ Warehouse surveillance camera.....



Note: " illegal use is not allowed! Or, there will be consequences to bear. "

In the box:

1x Black box camera	1x User manual
1x USB cable	1x AC power adapter


2

Product structure

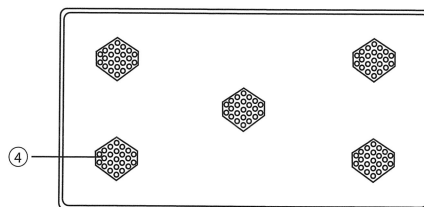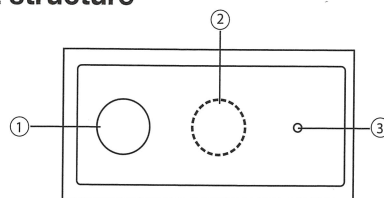

- ① PIR Sensor
- ② Invisible night vision led
- ③ Camera
- ④ Mircophone

3

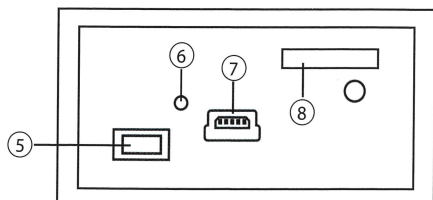

- ⑤ ON/OFF
- ⑥ Charging indicator
- ⑦ USB port
- ⑧ SD Card Slot

4

Getting started of camera part

Step 1: Insert micro SD card into card slot

TIPS:* Use micro SD card speed >= Class 4 & HC marked;
* Better format card by PC before inserting.

Step 2: Turn on backside ON/OFF switch

Step 3: Camera record every time a 3 minutes video automatically when PIR detected motion.

Note: Night vision will be switched on automatically when low light.

Once no motion, camera enter standby mode automatically.

5

Camera setting

When inserted micro SD card and turn on, device will form a txt file named setting in card automatically. Then you can do camera setting as below when connect to PC or by card reader.

6

- TIPS:** 1. When set up, please observe original format and value modification in the document to avoid invalid setting.
2. Save after set up, then turn on again to finish setting finally.

Other features:

Charging: Turn off backside switch and plug it into AC power using the included adapter, when charging green light always on, when full red light goes off.

8

Memory card	Micro SD card >=Class 10 & HC marked
Support memory	Max 64GB
USB interface	USB1.1/2.0
Operation system	2000/XP/Vista/32
Player	Media player/Kmplayer
Recording	1 minute/ around 111MB

FAQ:

1. Q: Blue light always blinking, can't record or shut down automatically?
A: 1). Card might not compatible, please use micro SD card speed >=Class 4 & HC marked.
2). Device with low battery, please charge it.

10

Function introduction

Resolution	=0	(0=1080P,1=720P,2=480P)
Audio_Record	=1	(0=Off,1=On)
Loop_Record	=1	(0=Off,1=On)
Record_Time	=1	(0=1min,1=3min,2=5min,3=10min)
Motion_Level	=2	(0=highest,1=high,2=middle,3=low,4=lowest)
Motion_Time	=1	(0=1min,1=3min,2=5min,3=10min)
Date_Stamp	=1	(0=Off,1=On)
Time_set	=N2017/01/01 00:00:00	(Y=change N=No change)

7

Specification

Resolution	2.0 Mega CMOS
Video pixel	1920*1080
Frames	Max 30fps
Night vision	5 meters
Angle	90 Degree
Compressed format	H.264
Video format	MOV

9

2. Q: Can't record while charging for an extended period?
A: Check if the back green light is on while charging; If not, check that the charger is connected properly.
3. Q: How to play video?
A: Use the included USB cable to connect to the PC to play when in U disk mode; Or, use a card reader to read and play video.
4. Q: How to reset the device?
A: If the device is not working or is frozen, turn off the back side ON/OFF switch and turn on again to reset.

11